


TORNADO

SPECIALIST LIFTING & LOWERING DEVICE

For raising, lowering & positioning loads and endless loop systems

POSITIONING

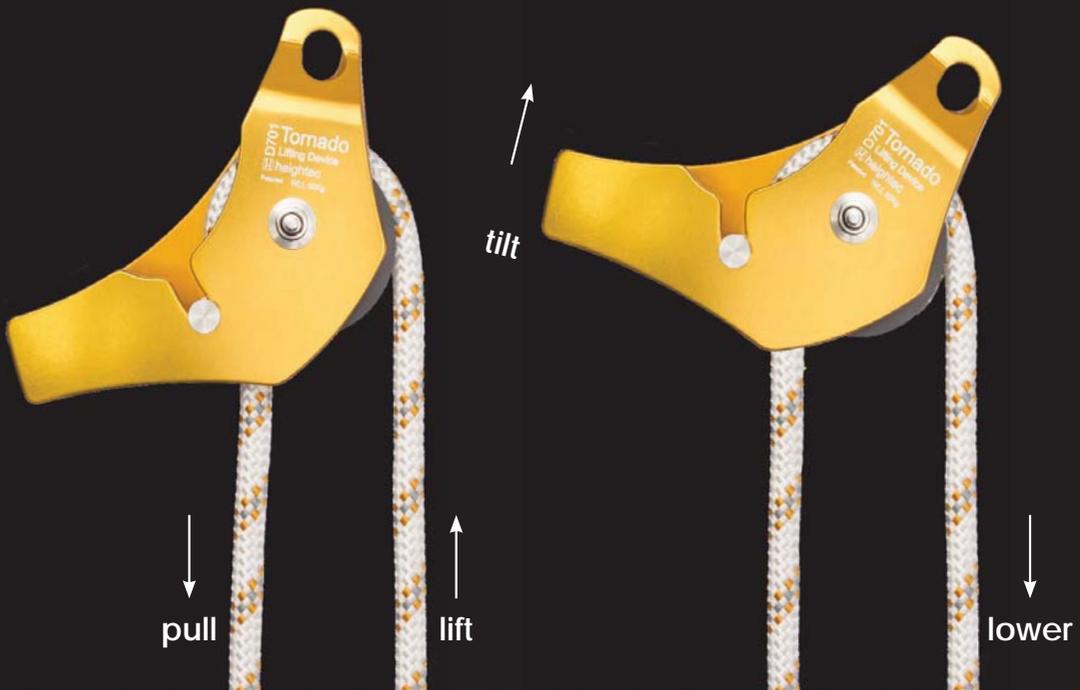

FEATURES & BENEFITS

Locks if released when lifting or lowering

One way sealed bearing system in the main cam allows it to rotate freely when lifting but lock when lowering

Functions as a pulley when lifting for minimum friction

Can be used in compound pulley systems to increase mechanical advantage


Mechanism provides friction for controlled lowering, by simply tilting the device to lower

Use with 'endless loop' hand hauling system uses tail rope as a guide & positions lifted load away from the structure

Complete **lifting systems** available from heightec

SPECIFICATIONS

- SWL 50kg
- Kernmantel rope:
ø 10.5-12mm
- Dimensions:
W 14.5 x L 13 x D 4cm
- Weight: 0.45kg
- Conformity: CE EN 13157
- Available in heightec
lifting & lowering kit WK56
- Patented GB 2 437 793

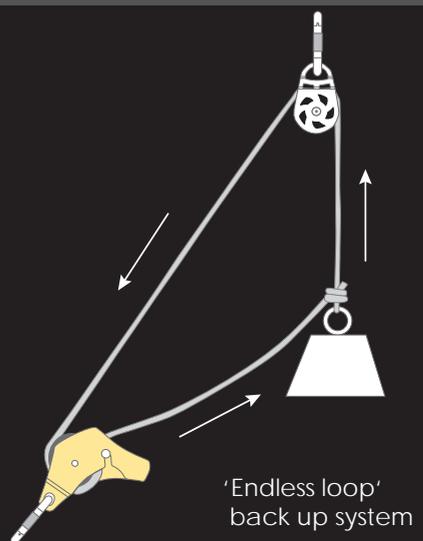

[CLICK HERE TO VIEW TECHNICAL INFORMATION NOTE - USING THE TORNADO](#)



Innovation and expertise for professional work at height and rescue

heightec.com



[Click here to watch the video](#)